

The Retarded Phase Factor in Wireless Power Transmission

Xiaodong Liu^{1*}, Qichang Liang¹, Yu Liang²

1. Department of Nuclear Physics, China Institute of Atomic Energy, P.O. Box 275(10), Beijing 102413, China
 2. Pangeo Corporation, 2005 Black Acre Dr., Oldcastle ON, N0R 1L0, Canada
- * Email: liuxiaod@gmail.com

Abstract

In this paper, we present the coupling equations involving retarded phase factor in wireless power transmission. Negative resistance can be achieved in specific range of distance between two resonators. The law of energy conservation is valid when the retarded phase factor is equal to one.

Keywords: *wireless power transmission, retarded phase factor, negative resistance*

Introduction

Nikola Tesla invented wireless power transmission one century ago. This technology has been awoken for modern applications [1-3]. Recently we indicated the dependence of wireless power transmission on retarded phase factor [4,5]. In this work, we solved the coupling equations of two resonators involving retarded phase factor. The characteristic of negative resistance is also revealed.

Methods

The schematic shown in Fig.1 is very similar to the original designing of Tesla. The circuit on the left, which is called transmitter, is composed of an antenna C_1 , an inductor L_1 , a power source V , and a resistance R_1 . The circuit on the right, which is called

receiver, is composed of an antenna C_2 , an inductor L_2 and a resistance R_2 . The distance between the two resonators is D .

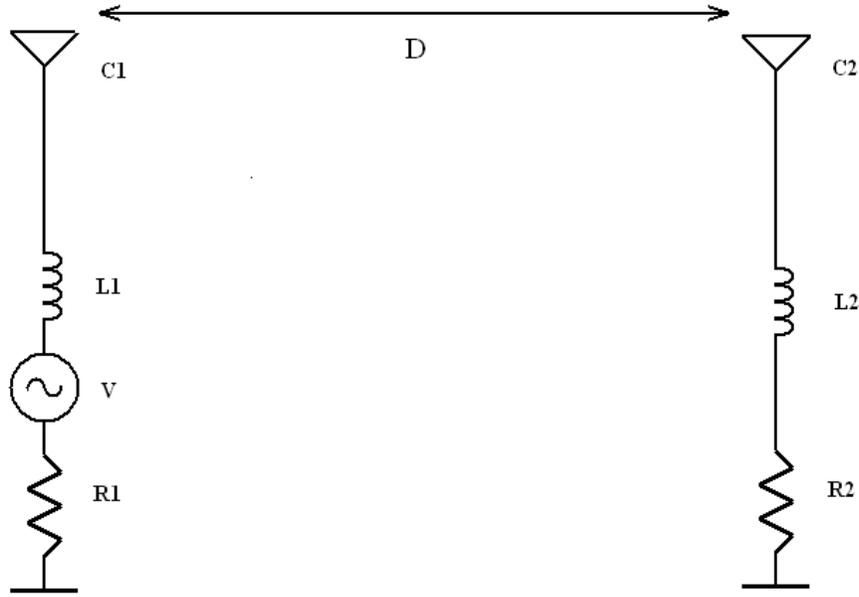


Figure 1: Schematic of two resonators separated in distance D .

The coupling equations of the system are:

$$I_1 \cdot \left(R_1 + j\omega L_1 + \frac{1}{j\omega C_1} \right) = V + j\omega M \cdot \psi \cdot I_2 \quad (1)$$

$$I_2 \cdot \left(R_2 + j\omega L_2 + \frac{1}{j\omega C_2} \right) = j\omega M \cdot \psi \cdot I_1 \quad (2)$$

where M is the mutual inductance between two resonators and ψ is the retarded phase factor:

$$\psi = e^{-i2\pi \frac{D}{\lambda}} \quad (3)$$

These equations are similar to that of Sample [3] except we include the retarded phase factor. If we assume

$$Z_1 = R_1 + j\omega L_1 + \frac{1}{j\omega C_1} \quad (4)$$

$$Z_2 = R_2 + j\omega L_2 + \frac{1}{j\omega C_2} \quad (5)$$

Then the current in the transmitter is

$$I_1 = \frac{V}{Z_1 + \frac{\psi^2 \omega^2 M^2}{Z_2}} \quad (6)$$

If the distance D is short, $D \ll \lambda$, then $\psi \approx 1.0$. We have

$$I_1 = \frac{V}{Z_1 + \frac{\omega^2 M^2}{Z_2}} \quad (7)$$

The effective impedance of the receiver coupled to the transmitter is positive so that the current I_1 will be reduced after coupling of the receiver. This is what we observed in previous measurements [1-3] since their distances are much less than their wavelength. However, if the distance D is equal to one quarter of wavelength, $D = \lambda/4$, then $\psi = -1.0i$.

We have

$$I_1 = \frac{V}{Z_1 - \frac{\omega^2 M^2}{Z_2}} \quad (8)$$

The effective impedance of the receiver coupled to the transmitter is negative so that the current I_1 will be increased after coupling of the receiver. This is an interesting result. The effective impedance of the transmitter is

$$Z_1' = Z_1 - \frac{\omega^2 M^2}{Z_2} \quad (9)$$

which could be negative if the value of Z_2 is small enough. In that case, there is no stable solution for I_1 . Assuming resonating at natural frequency in both resonators:

$$L_1 C_1 = L_2 C_2 = \frac{1}{\omega_0^2}$$

$$Z_1 = R_1$$

$$Z_2 = R_2$$

$$R_1' = R_1 - \frac{\omega^2 M^2}{R_2} \quad (10)$$

The unstable function of I_1 has the solution of

$$I_1 = A e^{-\beta t} \cos(\omega t + \alpha) \quad (11)$$

Where

$$\beta = \frac{R_1'}{2L_1} \quad (12)$$

When R_1' has negative value, the current in transmitter will increase exponentially, as well as the current in receiver.

Conclusion

In retarded resonance, the power transmission is determined by the retarded phase factor. The effective resistance of the receiver coupled to the transmitter could be negative. The oscillation amplitudes in transmitter and receiver would increase exponentially when the effective resistance of the transmitter is negative.

Acknowledgement

Special thanks to Mrs. Yulan Yao, Mr. Jian Liang, and Mr. Fengjun Zang for their encourage-ments and financial support to this work. The author X. Liu would thank Mr. Davor Emard for his helpful discussions.

References

- [1] Aristeidis Karalis, J.D. Joannopoulos, Marin Soljacic, *Efficient wireless non-radiative mid-range energy transfer*, *Annals of Physics*, v323 (2008), pp. 34-48
- [2] Andre Kurs, Aristeidis Karalis, Robert Moffatt, J. D. Joannopoulos, Peter Fisher, Marin Soljacic, *Wireless Power Transfer via Strongly Coupled Magnetic Resonances*, *Science*, July 2007, v317, pp. 83-86
- [3] Alanson P. Sample, David T. Meyer, Joshua R. Smith, *Analysis, Experimental Results, and Range Adaptation of Magnetically Coupled Resonators for Wireless Power Transfer*, 2009, <http://web.media.mit.edu/~jrs/WREL-paper.pdf>
- [4] Qichang Liang, Yu Liang, Xiaodong Liu, *Energy Multiplier in Retarded Resonance*, April, 2011, <http://www.vixra.org/pdf/1104.0052v1.pdf>
- [5] Qichang Liang, Yu Liang, Xiaodong Liu, *The Retarded Energy Transmission in Remote Resonance*, *Sciencepaper Online*, No. 200908-176, August 2009, <http://www.paper.edu.cn/index.php/default/releasepaper/downPaper/200908-176>